

FEATURES

- ❖ Rugged
- ❖ Reusable
- ❖ Programmable start time
- ❖ Real-time operation
- ❖ Automatic dew point & vapor concentration calculations
- ❖ N.I.S.T. traceable
- ❖ User-friendly
- ❖ Low cost

APPLICATIONS



- ❖ Implement HACCP Programs
- ❖ Autoclave Verification
- ❖ Food preparation and processing
- ❖ Environmental studies
- ❖ Warehouse Monitoring
- ❖ Hostile environment monitoring
- ❖ Medical/Pharmaceutical



The RHTEMP1000 humidity and temperature logger is a rugged, water resistant, battery powered, stand alone device which can be used to automatically record humidity and temperature. This all in one compact, portable, easy to use device is able to measure and record up to 21,845 humidity and temperature measurements. The RHTEMP1000 is ideal for use in harsh environments. Its real time clock ensures that all the data is time and date stamped. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The RHTEMP1000 makes data retrieval quick and easy. Simply plug the device into an empty COM port and our user-friendly software does the rest.

SOFTWARE

MadgTech's Data Recorder Software is an easy to use Windows-based software package that allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

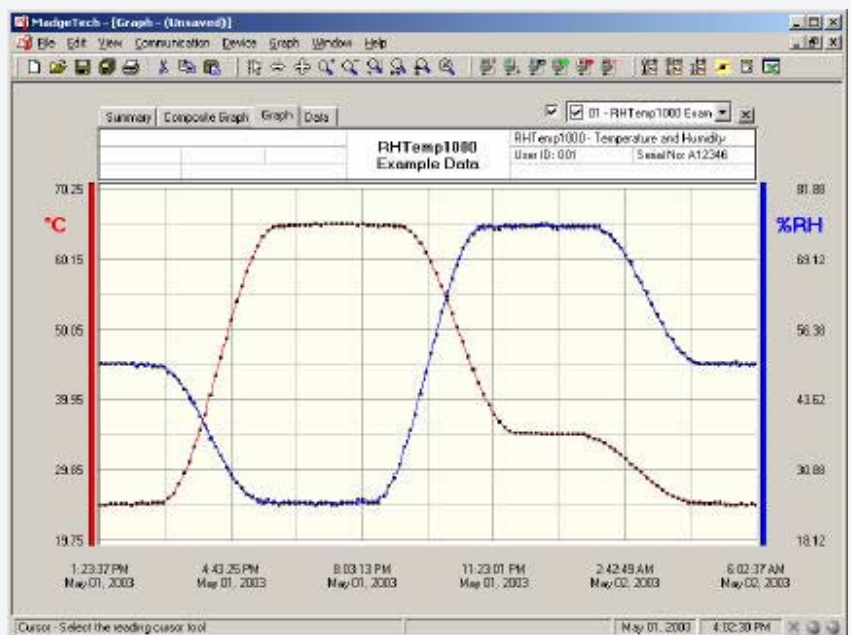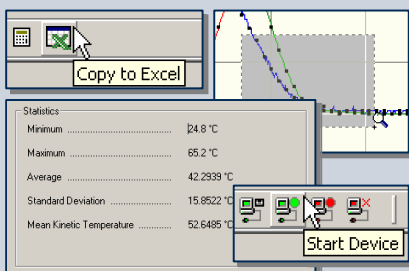

Demo our software at www.madgetech.com

Temperature Sensor: Semiconductor
Temperature Range: -40 °C to +80 °C
Temperature Resolution: 0.1 °C
Calibrated Accuracy: ±0.5 °C (0 to +50°C)

Humidity Sensor: Semiconductor
Humidity Range: 0 to 100% RH
Humidity Resolution: 0.5% RH
Calibrated Accuracy: ±3%RH (±2% RH typical at 25 °C)
Response Time: 90% change in 60 seconds in slow moving air

Specified Accuracy Range: 10 to 80 %RH, +10 °C to +40 °C

Start Time: Software programmable Start time and date. Up to six months in advance.

Real Time Recording: May be used with PC to monitor and record data in real time

Memory: 21,845 readings per channel
Reading Interval: 1 reading every 2 seconds to 1 every 12 hours
Calibration: Digital Calibration through software
Calibration Date: Automatically recorded within device
Power: 3.6V lithium battery included
User Replaceable Battery: 1 year typical at 25 °C, 1 minute reading intervals
Data Format: Date and time stamped °C, °F, °K, °R ; %RH, mg/ml water vapor concentration
Time Accuracy: ±1 minute/month (at 20 °C)
Computer Interface: PC serial or RS232C COM (Interface cable required); 2400 baud
Software: Windows 95/98/ME/NT/2000/XP based software
Operating Environment: -40 °C to +80 °C, 0 to 100 %RH
Dimensions: 5.4" x 1.0" dia. (138mm x 26mm dia.)
Weight (Aluminum) : 5 oz (145 g)
Weight (Stainless) : 10 oz (285 g)

RHTEMP1000 SOFTWARE FEATURES

Multiple Graphs:	Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics:	Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
Real-Time Recording:	Collect and display data in real-time while continuing to log	Export Data:	Export data in a variety of common formats, or switch to Excel with a single click
Graphical Cursor:	One click displays readings by time, value, parameter or sample number	Calibration:	Fully digital calibration function automatically stores parameters in device
Data Table:	Instantly access tabular view for detailed dates, times, values, and annotations	Logger Configuration:	Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Scaling Options:	Autoscale function fits data to the screen, r allows user to manually enter their own values	Communications:	Automatically sets up communications port, or lets user set configuration
Formatting Options:	Change colors, line styles, plotting options, show or hide channels in an instant	Printing:	Automatically print graphical or tabular data

**As part of our commitment to continuous product improvement, MadgeTech reserves the right to change product specifications without notice.

ORDERING INFORMATION

Model	Description
RHTEMP1000	Rugged Humidity and Temperature Recorder
IFC101	Software, manual and 9-pin computer interface cable
N.I.S.T. Cert	N.I.S.T. Calibration Certificate

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	pH
Humidity	Level
Pressure	Shock/Vibration
Bridge/Strain	Submersible
Current	Intrinsically Safe
Pulse/Event	RF Transmitters
Voltage	Multi-parameter



Birkenwaldstrasse 38
D-63179 Obertshausen
www.hero-instruments.de

Tel ++49 (0) 6104-98570
Fax ++49 (0) 6104-985733
hero-instruments@t-online.de