

FEATURES

- 3 · 10 year battery life
- 3 · High speed download
- 3 · N.I.S.T. traceable
- 3 · Real-time operation
- 3 · Low cost
- 3 · Programmable start time
- 3 · Reusable
- 3 · Miniature size
- 3 · User-friendly





APPLICATIONS

- 3 · Remote data logging
- 3 · Warehouse monitoring
- 3 · HVAC
- 3 · Medical/Pharmaceutical
- 3 · Museum monitoring
- 3 · Environmental studies
- 3 · Replace costly strip chart recorders
- 3 · Implement HACCP programs

The TEMP110 is a miniature, battery powered, stand alone temperature recorder. The TEMP110 features a real-time clock module that extends the battery life to > 10 years* and allows for high speed downloads. This is an all-in-one compact, portable, easy to use device that will measure and record up to 32,767 measurements. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The TEMP110 makes data retrieval quick and easy. Simply plug it into an empty com port and our user-friendly software does the rest.

SOFTWARE

MadgeTech's Data Recorder Software is an easy to use Windows-based software package that allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

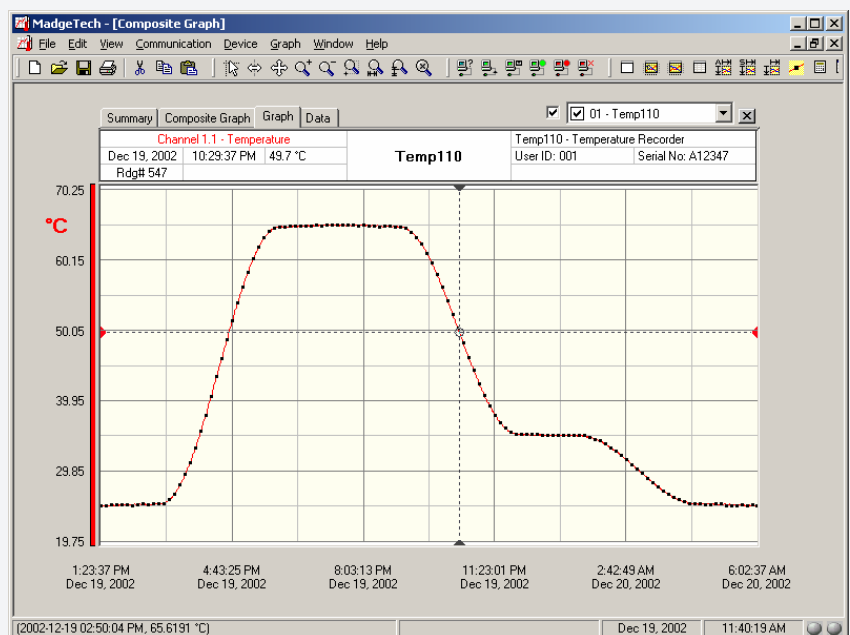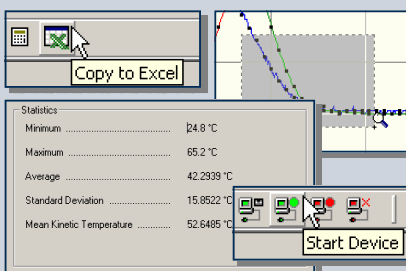

Demo our software at www.madgetech.com

Temperature Sensor: Semiconductor	Calibration: Digital calibration through software
Temperature Range: -40 °C to +80 °C	Calibration Date: Automatically recorded within device
Temperature Resolution: 0.1 °C	Power: 3.6V lithium battery included
Calibrated Accuracy: ±0.5 °C(0 to +50°C)	*User Replaceable Battery: 10 years (15 minute reading rate, 25 °C)
Start Time: Software programmable start time and date. Up to six months in advance	Data Format: Date and time stamped °C, °F, °K, °R
Real Time Recording: May be used with PC to monitor and record data in real time	Time Accuracy: ±1 minute/month (at 20 °C to 30 °C)
Memory: 32,767 readings	Computer Interface: PC serial or RS232C COM (Interface cable required); 57,600 baud
Reading Interval: 1 reading every 2 seconds to 1 every 12 hours	Software: Windows 95/98/ME/NT/2000/XP based software
	Operating Environment: -40 °C to +80 °C, 0 to 95 %RH non-condensing
	Dimensions: 0.8" x 1.7" x 2.3" (20mm x 42mm x 59mm)
	Weight: 2 oz (60 g)

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics: Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
Real-Time Recording: Collect and display data in real-time while continuing to log	Export Data: Export data in a variety of common formats, or switch to Excel with a single click
Graphical Cursor: One click displays readings by time, value, parameter or sample number	Calibration: Fully digital calibration function automatically stores parameters in device
Data Table: Instantly access tabular view for detailed dates, times, values, and annotations	Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values	Communications: Automatically sets up communications port, or lets user set configuration
Formatting Options: Change colors, line styles, plotting options, show or hide channels in an instant	Printing: Automatically print graphical or tabular data

**As part of our commitment to continuous product improvement, MadgeTech reserves the right to change product specifications without notice

ORDERING INFORMATION

Model	Description
TEMP110	Temperature Recorder
IFC110	Software, manual and 9-pin computer interface cable
N.I.S.T. Cert	N.I.S.T. Calibration Certificate

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	pH
Humidity	Level
Pressure	Shock/Vibration
Bridge/Strain	Submersible
Current	Intrinsically Safe
Pulse/Event	RF Transmitters
Voltage	Multi-parameter



Birkenwaldstrasse 38
D-63179 Obertshausen
www.hero-instruments.de

Tel ++49 (0) 6104-98570
Fax ++49 (0) 6104-985733
hero-instruments@t-online.de